

DS-2TP31B-3AUF Body Temperature Measurement Camera



The handheld thermal camera, specially designed for body temperature measurement. It's equipped with a 160×120 resolution thermal detector. It helps to quickly detect fever

Key Features

- 160×120 resolution
- Thermographic accuracy up to ± 0.5 °C
- 320×240 resolution 2.4" LCD display
- Built-in rechargeable Li-ion battery
- Up to 8 hours continuous running

Functions

Thermography

Device detects the real-time temperature, and display it on the screen.

Storage

Device is equipped with replaceable memory card to store recorded captured snapshots, and important data.

Palette

Device supports 4 palettes.





Specification


	Model	DS-2TP31B-3AUF
Parameter		Handheld Thermography Camera
Thermal Module	Image sensor	Uncooled Focal Plane Arrays
	Max. Resolution	160×120
	Pixel Pitch	17µm
	Response waveband	8μm to 14μm
	NETD	<40mK (@ 25 °C,F#=1.0)
	Field of View	$37.2^{\circ} \times 50^{\circ}$
	Focal length	3.1 mm
	IFOV (mrad)	5.48 mrad
	Min. Focus Length	$\geq 150 \text{ mm}$
	Aperture	F 1.1
Image Display	Monitor	320×240 resolution 2.4" LCD display
	Palettes	Black hot, White hot, Rainbow, Ironbow
Thermography	Rules	3 thermometry points: Max. Temperature; Min. Temperature; Center Temperature
	Thermographic Range	30°C to 45 °C
	Thermographic Accuracy	±0.5 °C
Battery	Battery Type	Rechargeable Lithium Battery
	Battery Operating Time	8 hours continuous running
Functions	Laser Light	Support (Point to the thermography target)
	Storage	Replaceable memory card (default 8G, support up to 128G storage)
	Photo	Thermal image
	Video	N.A.
	Language	English
General	Power	3.7 V DC/0.4 A
	Power Consumption	Less than 1.2 W
	Hardware Interface	micro USB
	Working Temperature	-10 °C to 50 °C (14 °F to 122 °F)
	Protection level	IP54
	Drop Test Height	2 m (6.56 feet)
	Dimension	196 mm \times 117 mm \times 59 mm (7.7 " \times 4.6 " \times 2.3 ")
	Weight	Approx. less than 350 g (0.77 lb)
	Accessory	Power Adaptor, USB cable, 8GB memory card, User manual, Disk, Wrist Strap

Order Models DS-2TP31B-3AUF

Box Content











User Manual (×1)

Disk (×1)


USB Cable (x1)


power Adapter (x1)

Wrist Strap (x1)



Dimension

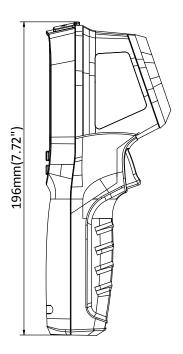

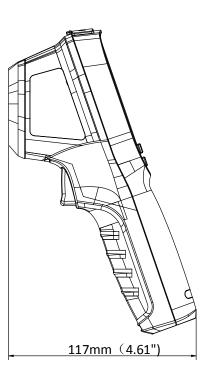



Distributed by

L



Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision USA T +1-909-895-0400 sales.usa@hikvision.com

Hikvision Australia T +61-2-8599-4233 salesau@hikvision.com

Hikvision India T +91-22-28469900 sales@pramahikvision.com

Hikvision Canada T +1-866-200-6690 sales.canada@hikvision.com

Hikvision Thailand T +662-275-9949 sales.thailand@hikvision.com Hikvision Europe T +31-23-5542770 sales.eu@hikvision.com

Hikvision Italy T +39-0438-6902 info.it@hikvision.com Hikvision Brazil T +55 11 3318-0050

Latam.support@hikvision.com Hikvision Turkey T +90 (216)521 7070- 7074

sales.tr@hikvision.com Hikvision Malaysia T +601-7652-2413 sales.my@hikvision.com Hikvision UK & Ireland T +01628-902140 sales.uk@hikvision.com

Hikvision South Africa Tel: +27 (10) 0351172 sale.africa@hikvision.com

Hikvision France T +33(0)1-85-330-450 info.fr@hikvision.com

Hikvision Kazakhstan T +7-727-9730667 nikia.panfilov@hikvision.ru

Hikvision Vietnam T +84-974270888 sales.vt@hikvision.com Hikvision UAE T +971-4-4432090 salesme@hikvision.com

Hikvision Singapore T +65-6684-4718 sg@hikvision.com

Hikvision Spain T +34-91-737-16-55 info.es@hikvision.com

Hikvision Tashkent T +99-87-1238-9438 uzb@hikvision.ru

Hikvision Hong Kong T +852-2151-1761 info.hk@hikvision.com Hikvision Russia T +7-495-669-67-99 saleru@hikvision.com

Hikvision Korea T +82-(0)31-731-8817 sales.korea@hikvision.com

Hikvision Poland T +48-22-460-01-50 info.pl@hikvision.com

Hikvision Indonesia T +62-21-2933759 Sales.Indonesia@hikvision.com

Hikvision Colombia sales.colombia@hikvision.com

© Hikvision Digital Technology Co., Ltd. 2018 | Data subject to change without notice |

1000001090123